


## Lagerström

### Nancy round bench - Cast on site version


#### Casting instructions

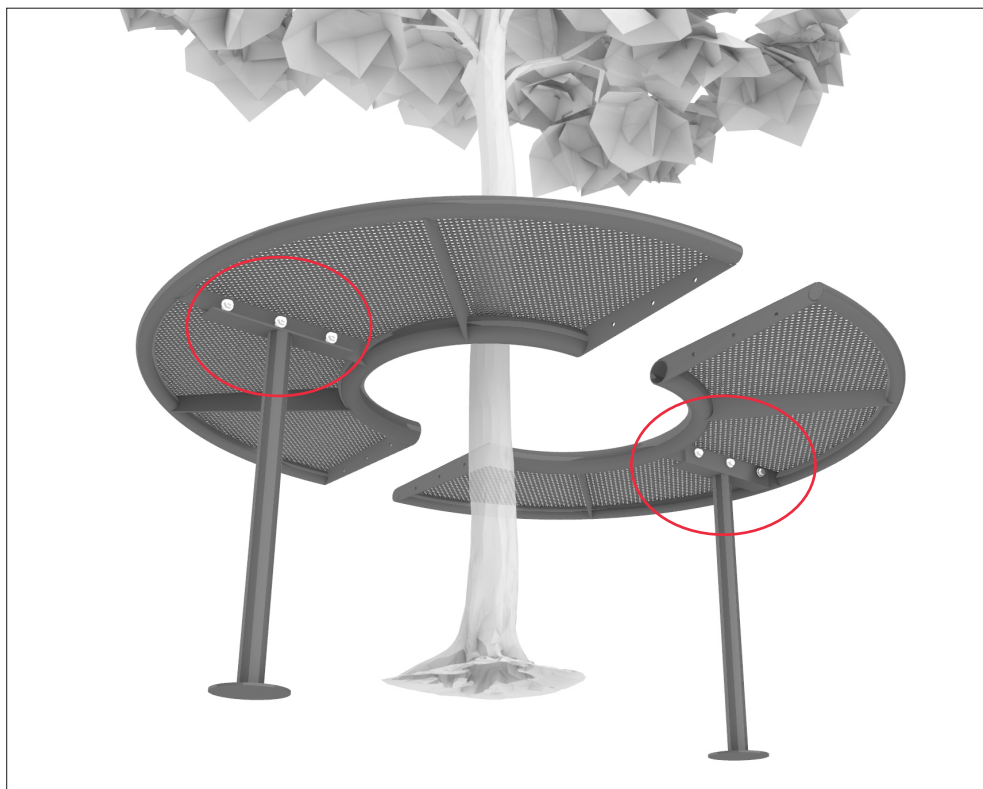

01.

Connect 2 legs structures to the 2 seat halves. Use 6 nuts, bolts and washers.

See illustration.

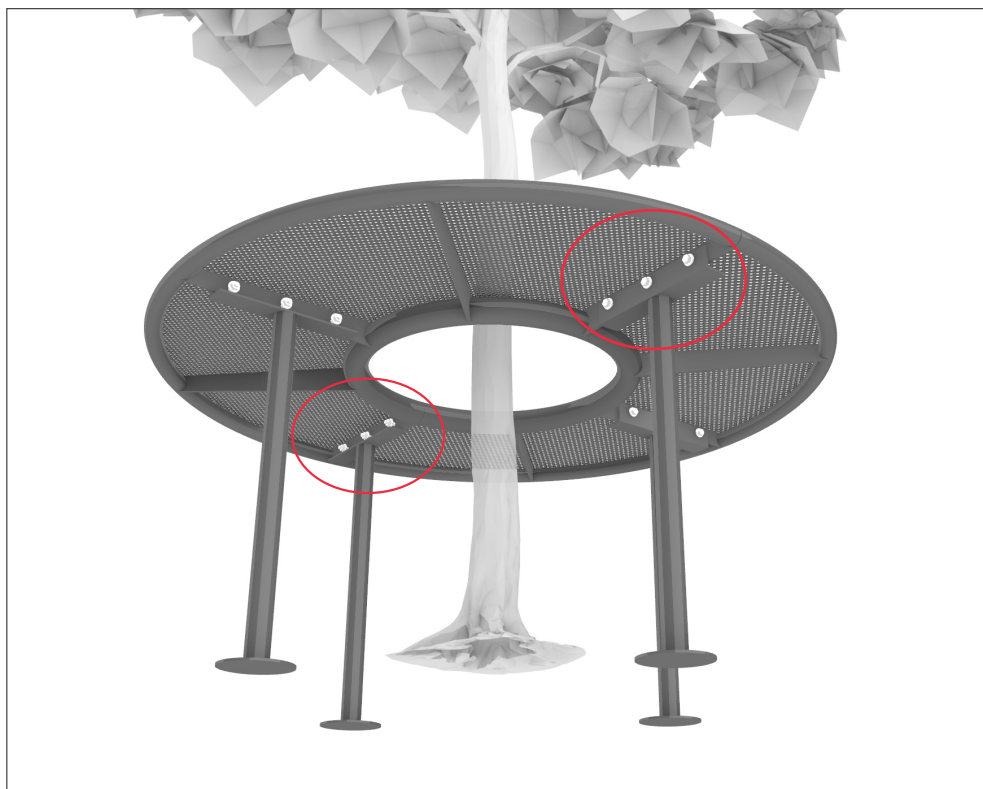

02.

Connect the 2 seat halves and 2 leg structures using 6 nuts, bolts and washers.

Connect **around the tree** if this is the wanted placement

See illustration.

## Lagerström

### Nancy round bench - Cast on site version

#### Casting instructions



#### 03.

Prepare 4 holes for casting the bench in the chosen position.

Minimum dimensions for each hole:  
Diameter 40cm, Depth 30cm

Note! If you are placing the bench round a tree, do not damage the roots of the tree.

Place the bench in the casting holes. Make sure the seat is horizontal and secure in place with (wooden) supports.

Important!  
Make sure the seat height is **450mm** over the ground level.



#### 04.

Cast concrete in all holes.  
Remove supports after curing

Level the holes with soil.